TurretCam

Wired security IP camera




True WDR









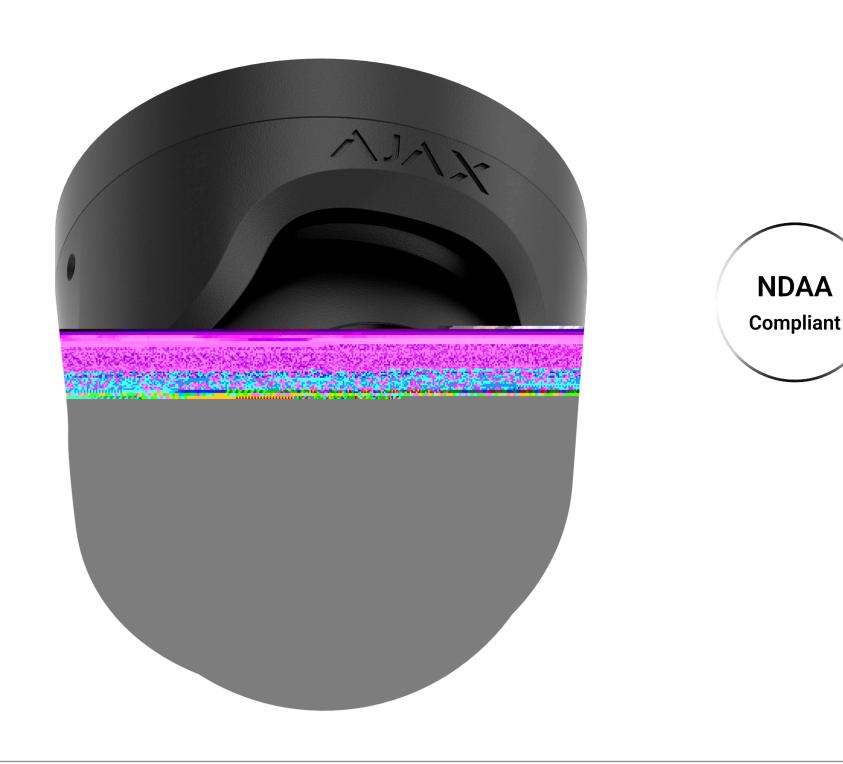

Product versions

TurretCam (5 Mp/2.8 mm)


Smooth archive navigation

- JetSparrow peer-to-peer streaming
- Instant live view
- Fast archive navigation with filters and calendar
- Dual streaming for instant preview
- Video clip export in a few clicks



Easy installation and maintenance

- Connection via QR code
- Configuration via Ajax apps
- Adjustable motion detection zones available in the apps
- Real-time supervision with health checks

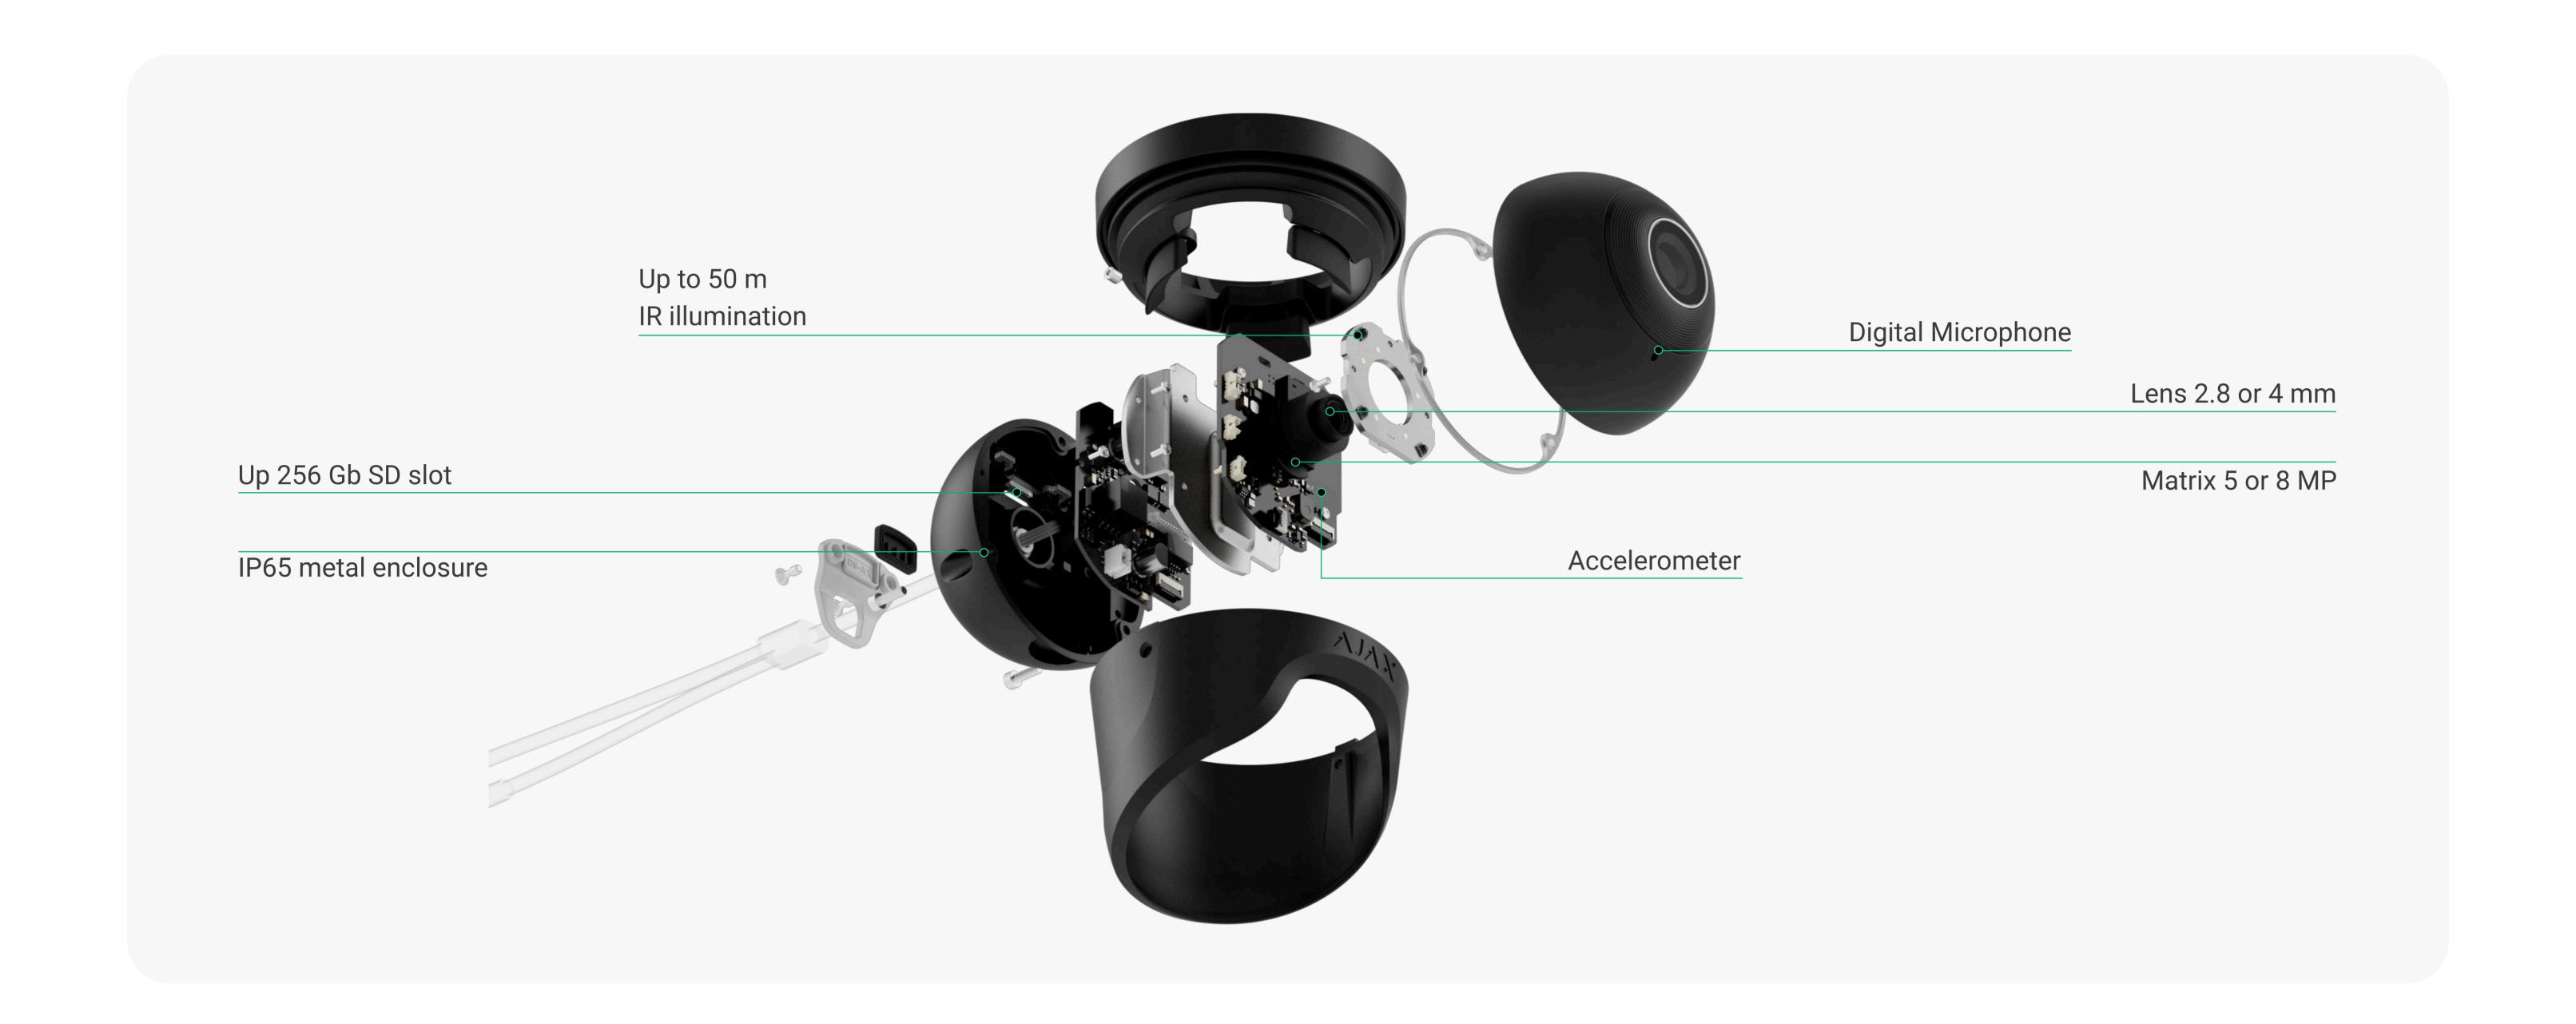

Superior, Fibra, and Baseline product lines are mutually compatible. This opens up numerous possibilities for building systems of any configuration.

Features Compatibility Power supply Resolution Hubs Power supply unit 5 MP Model: Up to 2,880 × 1,620 px @ 25 fps (3K UHD) 12 V ± 20% ==, 1 A All Ajax hubs 8 MP Model: Up to 3,840 × 2,160 px @ 20 fps (4K UHD) (up to 200 cameras in one Ajax system) Up to 15 W of mains power consumption Lens Video recorders **Ethernet port** 2.8 mm: 100°-110° Viewing Angle PoE Standard 802.3at/af NVR 4 mm: 75°-85° Viewing Angle Day/Night Switch Compliance Enclosure Automatic CE **Dimensions** Image processing 103 × 98 × 98 mm RoHS True WDR (hardware and software) NDAA Weight **Video Compression** 475 g H.265, H.264 Complete set Colors Bitrate Black 100 Mbps full-duplex White TurretCam Installation template Simultaneous Live View Operating temperature range Installation kit Up to 5 Channels from -30 °C to +60 °C Quick start guide from -22 °F to +140 °F **User Access** Up to 200 Users **Operating humidity** up to 90% **Alarm Trigger** Motion Detection, Al-recognition, Detector alarm, Automation scenarios

¹ Requires an SD-card installed or connection to NVR with a hard drive



For detailed information, scan the QR code or follow the link:









